

A COMPARATIVE STUDY OF SUGARCANE BAGASSE GASIFICATION AND DIRECT COMBUSTION

ARPIT SHUKLA^{1*} AND SUDHIR Y KUMAR²

¹Research Scholar, College of Engineering and Technology Mody University Rajasthan, India.

²Associate Professor, College of Engineering and Technology Mody University Rajasthan, India.

(Received 20 November, 2017; accepted 07 August, 2018)

Key words: Life cycle analysis, Gasification, Syngas thermo Economic analysis of sugar industry.

ABSTRACT

Anaerobic digestion and gasification are two of the main ways to convert biomass into gaseous fuels. Both pathways generate a combustible gas: biogas and synthetic gas (syngas), respectively. Biomass gasification generates syngas, which is attractive for energy applications because of its H₂, CO, and CH₄ contents. Syngas composition varies by reactor operating conditions and can be tailored to specific applications. The two main syngas applications are power generation and fuel synthesis. Gasification is almost as ancient as combustion, but it is less developed because commercial interest in it has not been as strong as in combustion. Thus, the main aim of this paper to provide a comparison of Bagasse (Sugar mill waste) direct combustion and gasification for sugar mill power production. This study is focused on the modelling, simulation and performance analysis of Bagasse gasification processes using Aspen plus Simulation software.

INTRODUCTION

Sugarcane is the highest yielding and most fecund crop in the world and having major byproducts of the sugar industry (Islam, *et al.*, 2010a). The sugar industry produces mainly four major types of wastes products: cane residue left in the field after harvesting, bagasse, press mud and spent wash. (Gupta, *et al.*, 2011).

Bagasse is the remainder left after cane crushing operation and is the fuel resource of that industry (Rasul, *et al.*, 1999). Pressmud is the compressed sugar industry waste produced from the filtration of the cane juice. It is a good source of fertilizer. (Gupta, *et al.*, 2011).

Bagasse is a lignocellulosic residue of the sugar industry, which consists of around 40–50% cellulose, 20–30% hemicellulose, 20–25% lignin and 1.5–3% ash or generally it can be say that it contains 50% fiber, 48% moisture and 2% sugar which couldn't be extracted (Chauhan, *et al.*, 2011). It has high energy content (Drummond and Drummond, 1996). It assumes an

imperative part to satisfy the vitality prerequisite for creating nations like India, Brazil and so forth., where huge measure of sugarcane are delivered. After Brazil, India is second significant producer of sugarcane on the planet. In year 2011–2012 around 330.36 million metric tons of sugarcane was produced on 4.71 million hectares of land, with an average yield of 70.07 tons/ha (USDA Gain Report). Generally, one ton of raw sugar-cane produces around 100 kg of sugar, 270 kg of dry bagasse and 35 kg of molasses (García-Pérez, *et al.*, 2002a). For the most part, bagasse is utilized as a fuel hotspot for boiler in sugar plants. Be that as it may, this isn't completely utilized as a wellspring of vitality in sugar factories, since it makes the waste administration issue at process site. In addition, the direct combustion of bagasse in boilers has efficiency of only 26%, as well as the burning of bagasse in the boilers form airborne fly ash, which is responsible for major health hazard (ASTM D1102 – 84, 2013; ASTM E872 – 82, 2013; Gagliano, *et al.*, 2017; Mavukwana, *et al.*, 2013).

Conversion of biomass into energy is undertaken using three main process technologies: Thermochemical, biochemical/biological and mechanical extraction (with esterification/ trans esterification) for biodiesel production, within thermochemical conversion four process options are available: combustion, pyrolysis, gasification and liquefaction. Bio-chemical conversion encompasses two process options: digestion (production of biogas, a mixture of mainly methane and carbon dioxide) and fermentation (production of ethanol). The (Fig. 1) is explaining, the intermediate energy carriers and the final energy products to each type of thermo-chemical conversion.

There are numerous routes to convert the chemical energy in biomass into heat or electric power. Direct combustion releases heat that can be used in Stirling engines or Rankine steam power cycles. (Mavukwana, *et al.*, 2013) Alternatively, thermal treatment with low-oxygen concentrations yields intermediate materials with varying energy properties. Carbonization and slow pyrolysis produce a charcoal material with high-carbon concentration. Biomass gasification results in a combustible gas. Fast pyrolysis generates mostly a liquid fuel.

Gasification is a thermal process characterized by an oxygen-deficient environment and temperatures

above 750°C. In this environment, most carbonaceous material converts into a flammable gas consisting of CO, hydrogen (H₂), CH₄, CO₂, and smaller quantities of heavier hydrocarbons. Gasification may take place with either air or pure oxygen input. (Anthony, *et al.*, 2014) Air gasification yields gas with high N₂ content commonly known as producer gas; gas from oxygen gasification is known as synthetic gas or syngas. Steam may also be introduced into the gasification environment as an oxygen carrier. (Anthony, *et al.*, 2016; Ashok, *et al.*, 2014) Gasification requires heat input that is delivered either internally from partial combustion of the feed input or via external heaters. Gasification performance depends on the ability to introduce oxygen and heat into its environment. Residual material from biomass gasification includes unconverted carbon (char) and ash (Catharina, *et al.*, 2006)

The gasification process involves four primary steps (Chauhan, *et al.*, 2011): heating and drying, pyrolysis, gas-solid reactions, and gas-phase reactions. As in combustion, heating and drying evaporates all feed moisture before the particle temperature increases to gasification temperatures. Pyrolysis occurs once the thermal front penetrates the particle, resulting in the release of volatile gases via pores of increasing number and size (Godswill and Megwai, 2016;

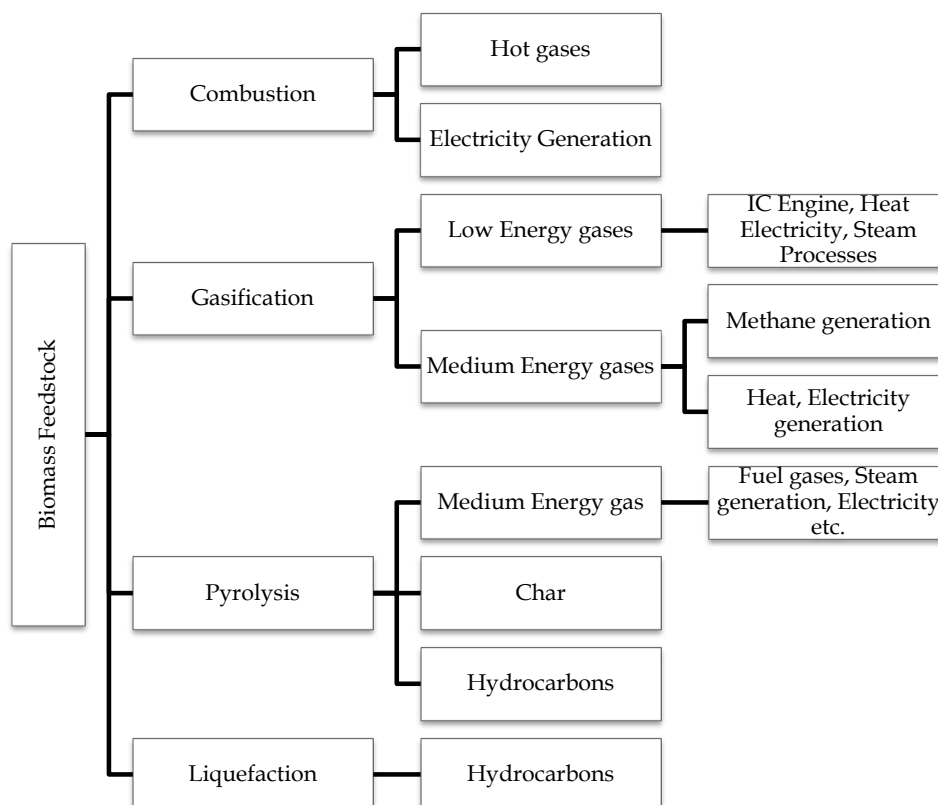


Fig. 1 Thermochemical conversion of biomass feedstock (ASTM E872 – 82, 2013).

Gupta, et al., 2011). The volatile gases include all gasification final products as well as tar. Tar consists of heavy and extremely viscous hydrocarbon compounds. After the pyrolysis step, these gases react with the particle surface, which is now primarily char, in a series of gas–solid endothermic and exothermic reactions that increase the yield of light gases. Finally, released gases continue to react in the gas–phase until they reach equilibrium conditions. (Daniel, et al., 2017) The heating and drying, and pyrolysis steps during gasification are similar to those of combustion. However, in the case of gasification, pyrolysis yields a larger quantity of tarry material because of insufficient oxygen and/or temperature to decompose the heavier compounds. Much of this tar elutriates from the particle and accumulates upon condensation. Where gasification differs from combustion is in the gas–solid and gas phase reactions (Dipal and Baruah, 2014)

Sugarcane Bagasse Gasification

Proximate and ultimate analysis

It is necessary to understand the composition of biomass before its application in energy conversion systems (ASTM E871 – 82, 2013). Proximate and ultimate analysis of biomass are usually used to describe the composition of biomass and different indicators are often used to quantify these components. Standards were followed for the analysis. (ASTM E871 – 82, 2013; ASTM D1102 – 84, 2013; ASTM E872 – 82, 2013) Samples of sugarcane bagasse were obtained from the Sugar Mill operated in Central India. The dried sugarcane bagasse was milled to size using a cryogenic grinder. The results of the proximate and ultimate analysis of sugarcane bagasse are presented in Table 1.

Gasification Reactions

Table 2 shows the gasification reactions taking place during the gasification process in a gasifier

Assumptions

The following assumptions were considered in modeling the gasification process:

- Process is steady state and isothermal;
- H₂, CO, CO₂, CH₄, H₂O, tar and char are considered the product of devolatilization;
- Spherical and uniform size particle of average diameter throughout the process;
- Char contains carbon and ash;
- Pressure drops are neglected;
- Heat loss from the reactors and Tar formation are not considered during the process;
- Char is considered as impurity free as 100% carbon and Ash comes from the biomass is considered as inert, it does not react with other components.

Model simulation in a dual fluidized-bed gasifier using Aspen plus

The objective of the model was to study the energy potential of Bagasse in a biomass fed fluidized bed gasifier. ASPEN PLUS software is used for the simulation analysis. In these models, the zero-dimensional and time independent reactions were considered. As thermodynamic equilibrium model is considered for the simulation than there is no need of reaction kinetics and the reactor hydrodynamics (Ahmed and Gupta, 2012)The stoichiometric and nonstoichiometric methods are used. Minimization of the Gibbs free energy method is considered. The nonstoichiometric strategy is specific appropriate for biomass gasification reproduction as the correct compound formulae of biomass is obscure and the gasification response instruments are exceptionally confounded (Islam, et al., 1999; Islam, et al., 2002).

The diverse stages considered in ASPEN PLUS reproduction, so as to demonstrate the general

Table 1. Ultimate and proximate analysis of sugarcane bagasse.

| Analysis | Components | Composition | Standards |
|--------------------------------|------------------------------------|-------------|--|
| Proximate Analysis (Dry Basis) | Volatile Matter | 75.72 | ASTM E872 |
| | Fixed Carbon | 11.71 | The fixed carbon is a calculated value |
| | Ash | 2.2 | ASTM D1102 |
| | Moisture (moisture-included basis) | 10.3 | ASTM E871 |
| Ultimate Analysis (Dry Basis) | Carbon | 49.2 | (ASTM D 5373-02), (E 777) |
| | Hydrogen | 4.7 | (ASTM D 5373-02), (E 777) |
| | Oxygen | 43 | The Oxygen is a calculated value |
| | Nitrogen | 0.2 | (ASTM D 5373-02), (E 778) |
| | Sulfur | 0.04 | (ASTM D 5373-02), (E 775) |
| | Chlorine | 0.16 | (E 870 – 82) |
| | Ash | 2.7 | (ASTM D 1102) |

gasification process, are decay of the encourage, unstable responses, single gasification, and gas – strong division.

A Dual Fluidized Bed Gasifire is considered for the study for the gasification process of Bagasse Gasifire in Aspen Plus model simulator. The whole process is separated in different blocks as shown in (Fig. 2) and depicted in Table 3.

For the purpose of analysis, the reaction zones are represented by a number of blocks. (Fig. 1) shows the flow chart of biomass gasification simulation using Aspen Plus and Table 3 gives the brief descriptions of the unit operations of the blocks. The stream BIOMASS was specified as a nonconventional

stream and it was defined in terms of proximate and elemental analyses. When BIOMASS was fed into the system, the first step was the devolatilization stage was performed in the block PYR in which the RYield reactor was used. In PYR, the feedstock was transformed from a non-conventional solid into volatiles and char. The volatiles consisted of carbon, hydrogen, oxygen, and nitrogen, and the char was converted into ash and carbon, based on the ultimate analysis. The yield of volatiles was equal to the volatile content in the fuel according to the proximate analysis (Islam, *et al.*, 2003; Islam, *et al.*, 2010a).

Moreover, the actual yield distributions in PYR were calculated by a calculator block which was controlled by FORTRAN statement in accordance with the component characteristics of the feedstock (Islam, *et al.*, 2010b; Jaiver, *et al.*, 2014; Ke, 2014) The combustion and gasification of biomass were simulated by a block called GASF in which the chemical equilibrium was determined by minimizing the Gibbs free energy Table 4.

Simulation results

To find out the effect on syngas composition the four parameters are considered for the analysis i.e., Steam temperature, Air Temperature, Steam to Biomass

Table 2. Reactions taking place during the gasification process.

| Reactions | Chemical Equation |
|-----------------------|--|
| Char Gasification | $C + H_2O \leftrightarrow CO + H_2 + 131 \text{ KJ/mol}$ |
| Boundouard | $C + CO_2 \leftrightarrow 2CO + 172 \text{ KJ/mol}$ |
| Methane Decomposition | $\frac{1}{2} CH_4 \leftrightarrow \frac{1}{2} C + H_2 + 74.8 \text{ KJ/mol}$ |
| Water Gas Shift | $CO + H_2O \leftrightarrow CO_2 + H_2 - 41.2 \text{ KJ/mol}$ |
| Steam Reforming | $CH_4 + H_2O \leftrightarrow CO + 3H_2 + 206 \text{ KJ/mol}$ |

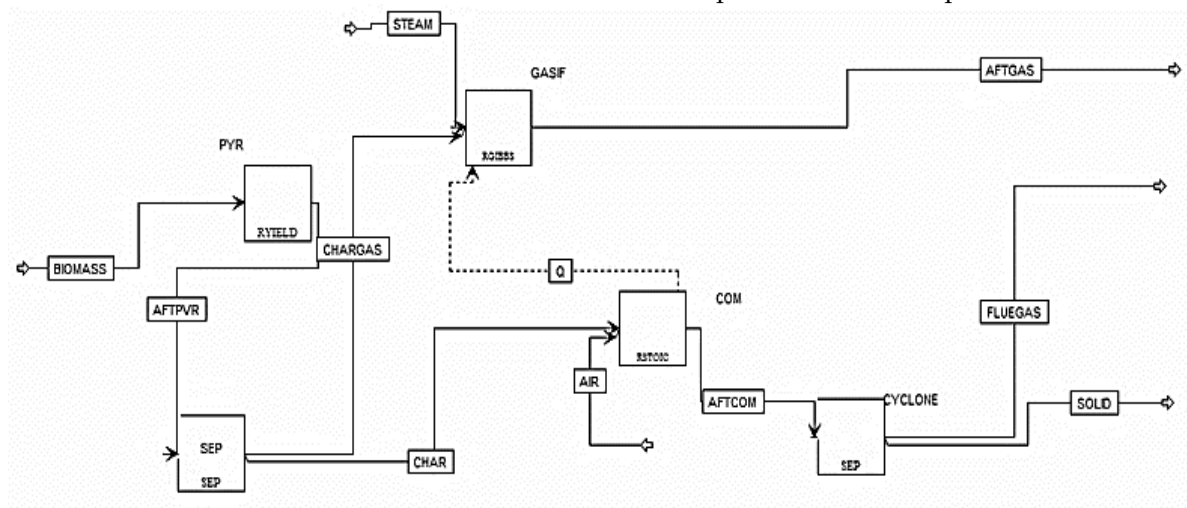


Fig. 2 ASPEN PLUS simulation model used for the study. (Ke, 2014).

Table 3. Description of the unit operations of the aspen blocks

| Aspen Plus Name | Block Name | Function |
|-----------------|------------|---|
| RYield | PVR | Decomposition of fuel from non conventional components to the conventional components according to its proximate and ultimate analyses |
| Seperator | SEP | Seperation of Char |
| RStoic | COM | The char combustion take place in the combustor-COM by surplus air, the heat Q is produced to upkeep the endothermic reactions in the gasifier-GASIFIER |
| RGibbs | GASF | Gasification and combustion of fuel |
| Cyclone | CYCLONE | The unreacted char and air is separated in a cyclone-CYCLONE into solid and flue gas. |

ratio and Gasification Temperature. The sensitivity analysis has been carried out for the study to find out the optimized gasification condition with respect to heating value of the fuel (Fig. 3-10) (Abdelouahed, *et al.*, 2012; Eikeland, *et al.*, 2015; Pardo-Planas, *et al.*, 2017; Priyanka and Rakesh, 2017).

The Lower heating value is greatly influenced by the all four parameters i. e. Steam Temperature, Air Temperature, Steam to Biomass Ratio and Gasification Temperature. It is increases with increment of steam, air and gasification temperature but it is maximum with steam to biomass ratio about 0.5-0.6.

While considering the Syn Gas composition H₂ is the main constituent having the higher composition while N₂ and CO₂ shows the lower value. About the average of 14.8 to 14.9 MJ/kg of bagasse of lower

heating value can be achieved by gasification process (Fig. 11) and Table 5.

The analysis of product by mass and by volume is given in Table 6.

Tables 5 and 6 shows the calculation for find out the percentage composition of dry flue gas produced after combustion of Syn Gas produced after gasification process. The Product after combustion are N₂, H₂O and CO₂. About 12.6% (by volume) CO₂ is generated which can affect the environment (Po-Chih, *et al.*, 2014; Ranjit, *et al.*, 2013; Rasul, *et al.*, 1999; Roos, 2010; Yurany, *et al.*, 2014; Yurany, *et al.*, 2012).

Direct combustion of bagasse in boiler

Combustion converts chemical energy directly into heat via rapid oxidation of the fuel. Primary products from combustion of carbonaceous products

Table 4. Operating condition and gasification parameters.

| Items | Parameters | Description |
|-----------------------------|--|--|
| Stream Class | MIXCINC | Both conventional and nonconventional solids are present, but there is no particle size distribution |
| Property method | PK-BM | Peng Robinson cubic equation of state with the Boston-Mathias alpha function |
| Non-Conventional Properties | Enthalpy-HCOALGEN Density-DCOALIGHT | Different empirical correlations for heat of combustion, heat of formation and heat capacity are included in the HCOALGEN model. |
| Feed | Bagasse (Sugar industry waste) | Specified as its ultimate, proximate and sulfur analysis at 25°C temperature and 1 atm pressure. |
| | Air | 21% O ₂ , 79% N ₂ at ambient temperature and pressure condition. |
| | Steam | Water at 500 °C temperature and atmospheric pressure condition. |
| Gasification Condition | | 850°C temperature and 1 atm pressure condition. |

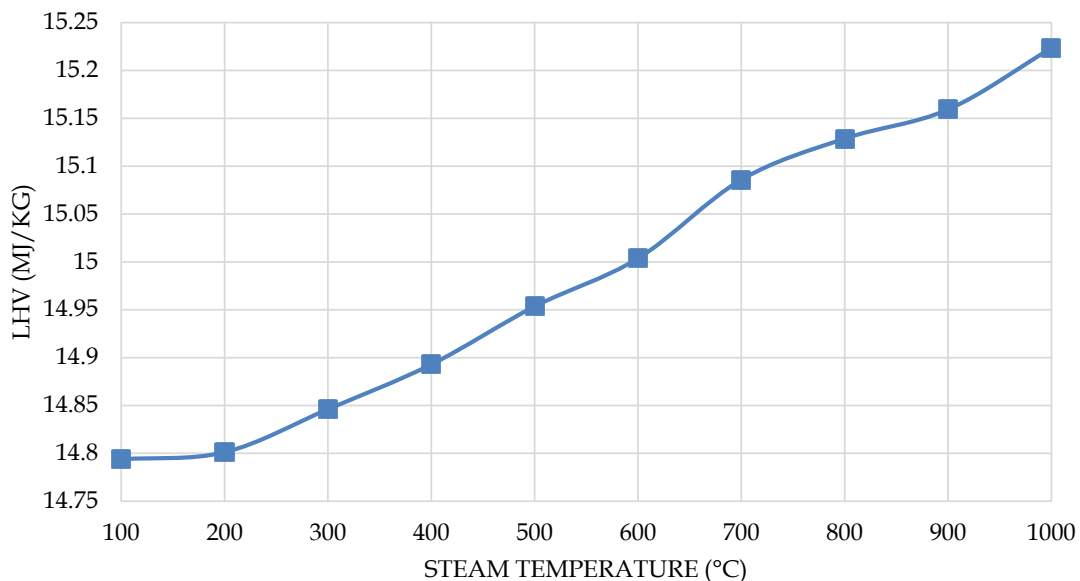


Fig. 3 LHV corresponding to steam temperature.

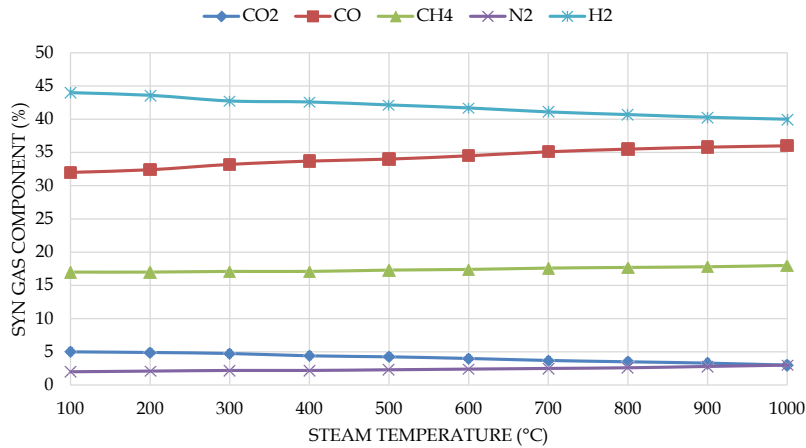


Fig. 4 Syn gas composition corresponding to steam temperature.

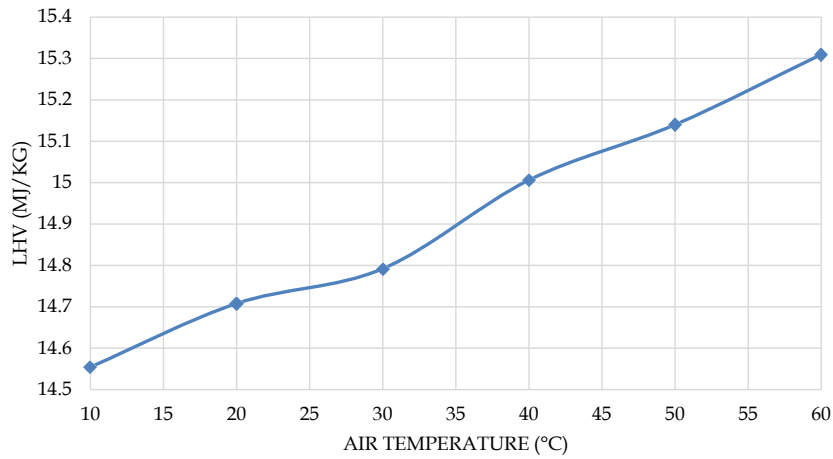


Fig. 5 LHV corresponding to air temperature.

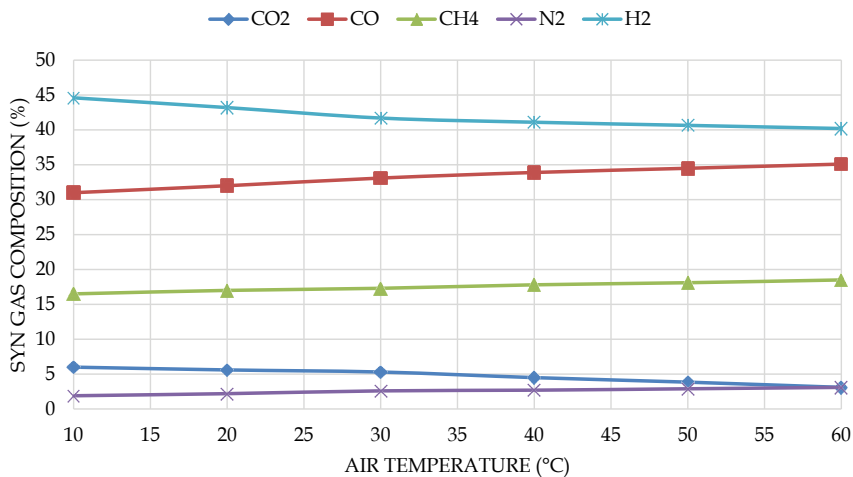


Fig. 6 Syn gas composition corresponding to air temperature.

include carbon dioxide (CO₂) and water. Secondary products result from incomplete combustion or reactions with fuel-bound nitrogen (N₂), sulfur, and other impurities. This part of paper is for calculation of amount of energy that can generated

by direct combustion of Bagasse in Boiler for power production.

The calorific or heating value of fuel may be obtained approximately from a chemical analysis of a dried sample (Ultimate and proximate analysis)

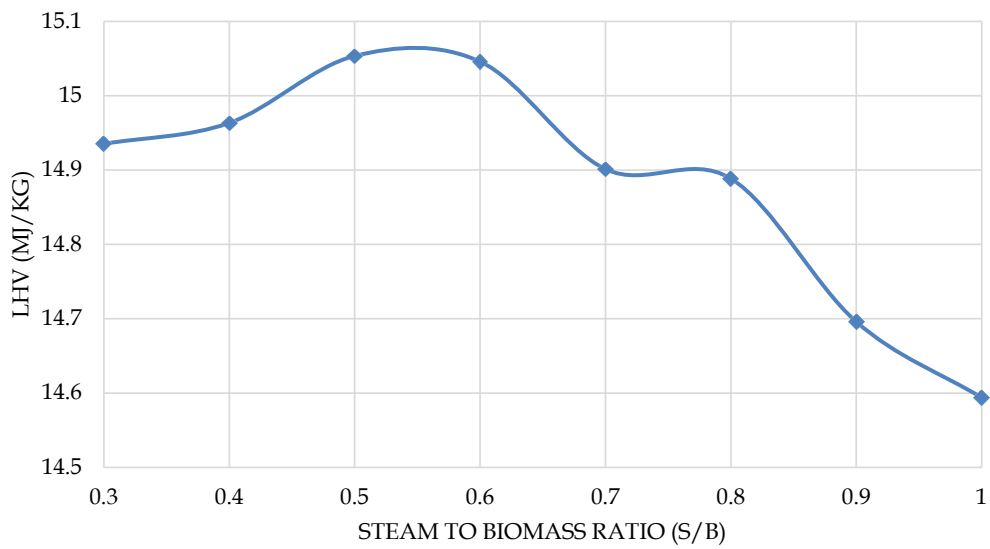


Fig. 7 LHV corresponding to steam to biomass ratio.

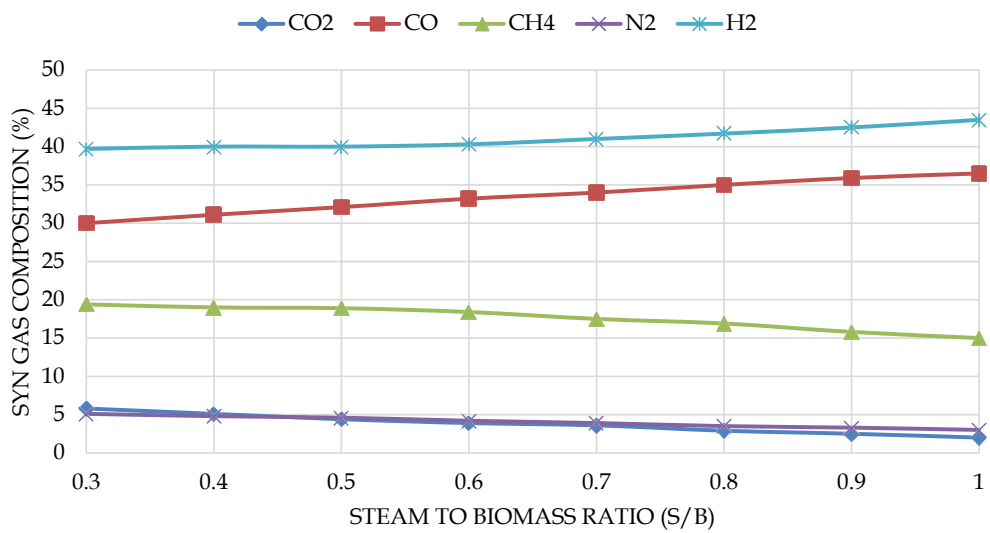


Fig. 8 Syn gas composition corresponding to steam to biomass ratio.

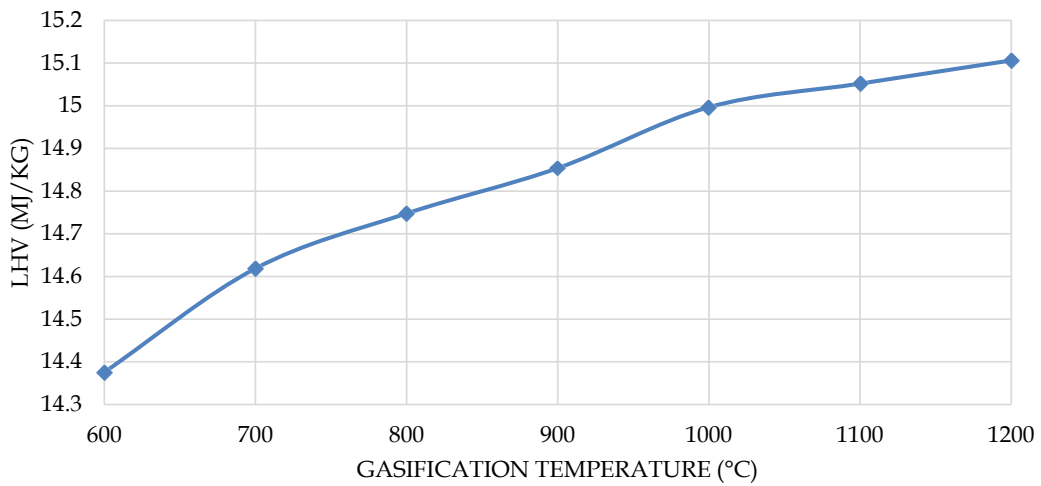


Fig. 9 LHV corresponding to gasification temperature (°C).

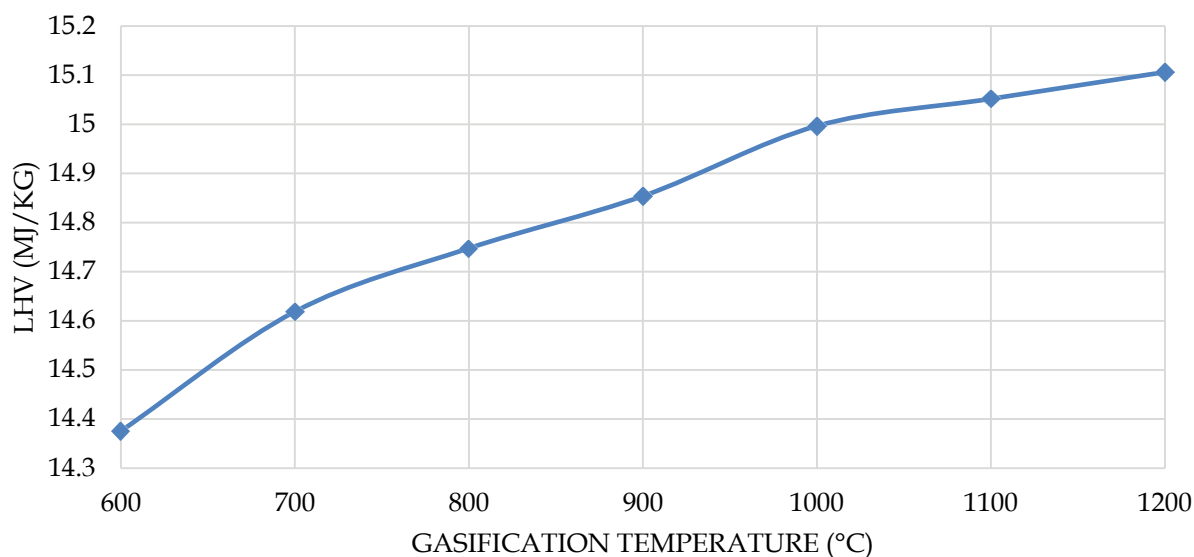


Fig. 10 Syn gas composition corresponding to gasification temperature (°C).

Percentage Composition of Dry Flue Gas after Syn Gas Combustion

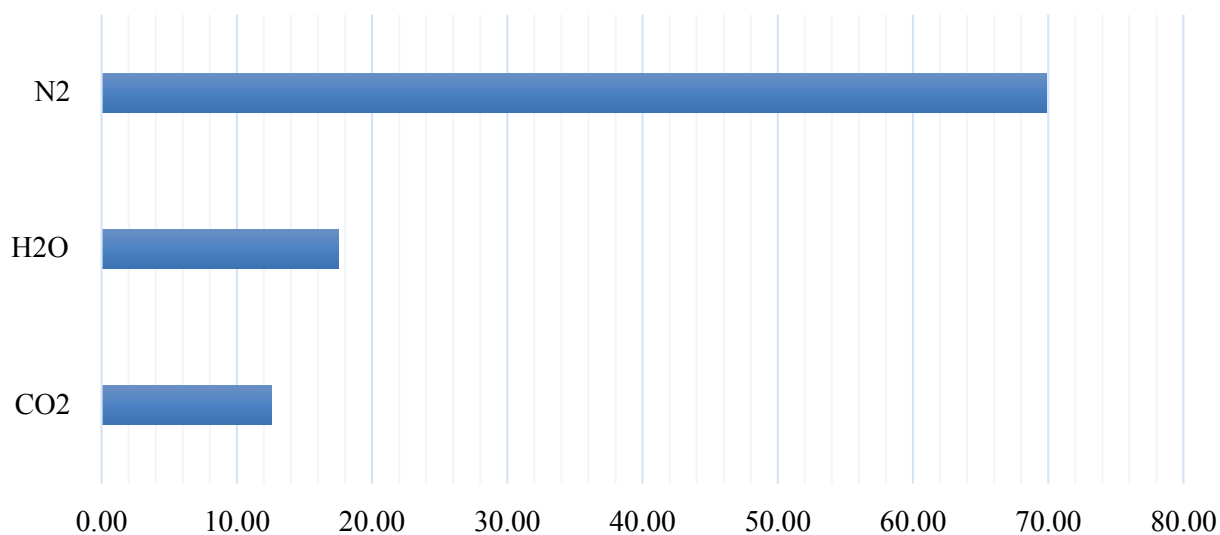


Fig. 11 Percentage composition of dry flue gas after syn gas combustion.

Table 5. The percentage composition of product of syn gas combustion.

| Reactants | Mols per mol of fuel | O ₂ required | Products | |
|-----------------|----------------------|-------------------------|-----------------|------------------|
| | | | CO ₂ | H ₂ O |
| CO | 0.329 | 0.1645 | 0.329 | |
| H ₂ | 0.4052 | 0.2026 | | 0.4052 |
| CH ₄ | 0.179 | 0.358 | 0.179 | 0.358 |
| O ₂ | 0 | | | |
| CO ₂ | 0.041 | | 0.041 | |
| N ₂ | 0.0458 | | | |
| | 1 | 0.7251 | 0.549 | 0.7632 |

The LHV of fuel is given by Dulong's Formulae

$$LHV = \frac{33800C + 144000\left(H - \frac{O}{8}\right) + 9270S - (9 \times 2442 \times H)}{100} \text{ KJ / Kg}$$

(1)

With the calculation by using equation (1) the lower heating value obtained is about 15.66 MJ/Kg Table 7.

Total O₂ required per kg of bagasse combustion: 1.26004 kg

$$\text{Mass of minimum air required} = \frac{1.26004 \times 100}{23} = 5.478 \text{ kg}$$

Table 6. The percentage composition of dry flue gas after syn gas combustion.

| Products | Mols per mo. Fuel | % Volume | Molecular Mass (M) kg per mol. Fuel | Kg per mol. Fuel | % by mass |
|------------------|-------------------|----------|-------------------------------------|------------------|-----------|
| CO ₂ | 0.549 | 12.60 | 44 | 24.16 | 19.61 |
| H ₂ O | 0.7632 | 17.51 | 18 | 13.74 | 11.15 |
| N ₂ | 3.046 | 69.89 | 28 | 85.29 | 69.24 |
| | 4.3582 | 100.00 | | 123.1816 | 100 |

Table 7. The product of direct combustion in kg/kg of bagasse.

| Constituents | Mass per Kg of Bagasse | O ₂ required per kg of constituent | O ₂ required per kg of Bagasse | Product of combustion in kg/kg of bagasse | | | |
|----------------|------------------------|---|---|---|-----------------|-----------------|------------------|
| | | | | N ₂ | CO ₂ | SO ₂ | H ₂ O |
| C | 0.492 | 2.67 | 1.31364 | | 1.80564 | | |
| H ₂ | 0.047 | 8 | 0.376 | | | | 0.423 |
| S | 0.0004 | 1 | 0.0004 | | | 0.0008 | |
| O ₂ | 0.43 | | -0.43 | | | | |
| N ₂ | 0.002 | | | 0.002 | | | |
| Ash | 0.027 | | | | | | |

Table 8. The percentage composition of dry flue gas after direct combustion.

| Gas | Parts by Mass | Molecular Mass | Proportional Volume | Percentage Volume |
|-----------------|---------------|----------------|---------------------|-------------------|
| CO ₂ | 1.80564 | 44 | 0.041037273 | 14.31 |
| SO ₂ | 0.0008 | 64 | 0.0000125 | 0.004 |
| O ₂ | 0.63 | 32 | 0.0196875 | 6.87 |
| N ₂ | 6.32909 | 28 | 0.226038929 | 78.82 |

Percentage Composition of Dry Flue Gas after Direct Combustion of Bagasse

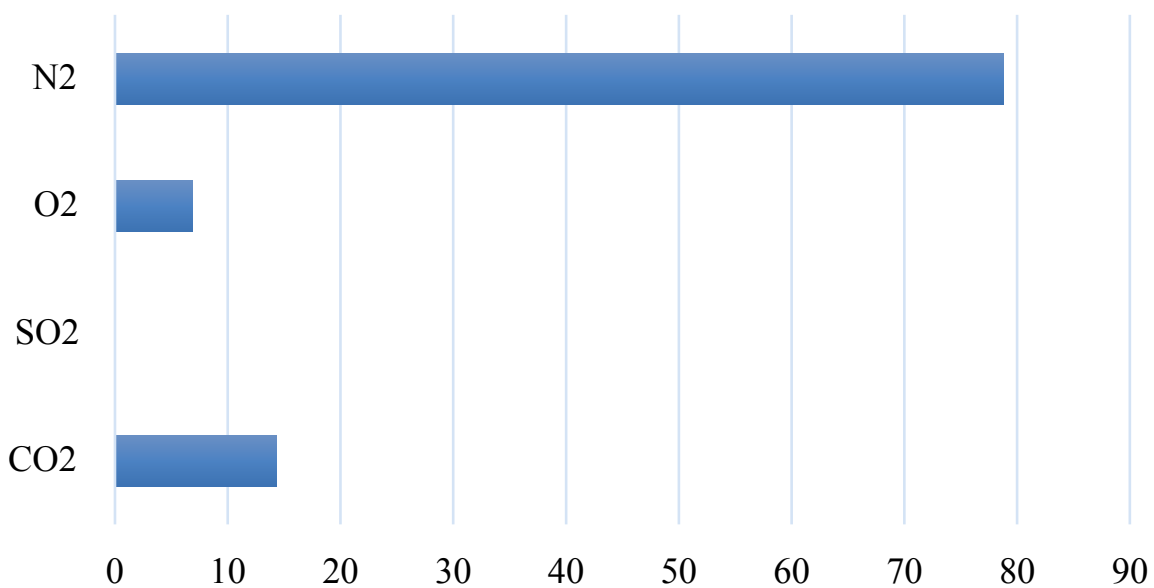


Fig. 12 Percentage composition of dry flue gas after direct combustion of bagasse.

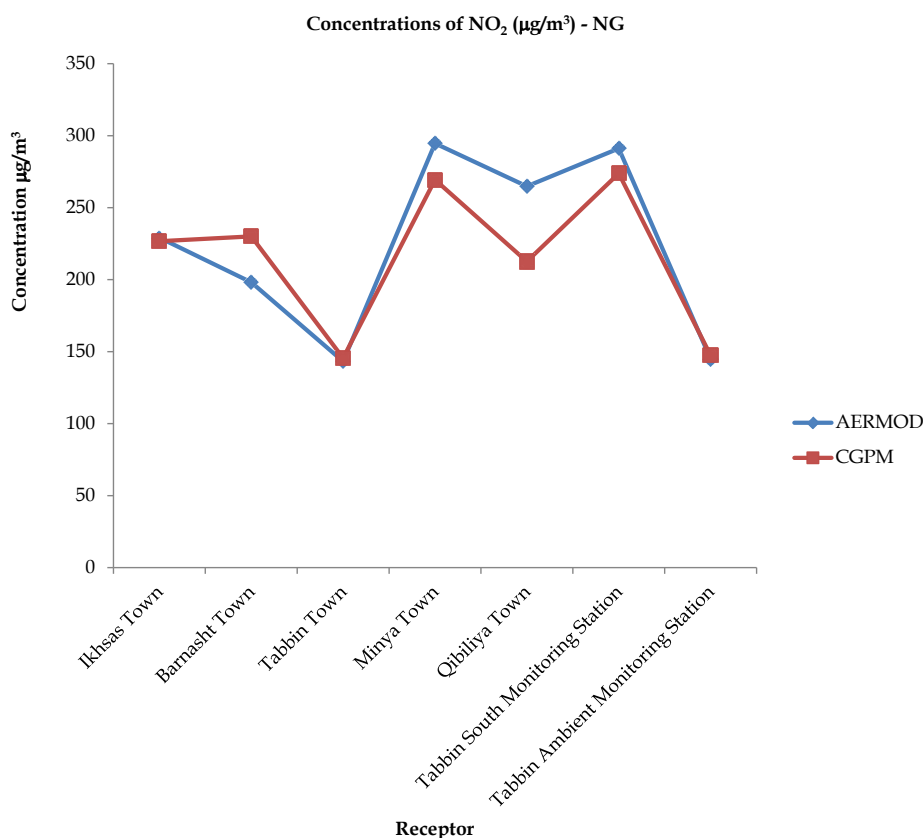


Fig. 13 Comparison between GCPM and AERMOD results of NO₂ concentrations in case of burning NG.

Nitrogen in actual air supply = $5.478 \times 1.5 \times 0.77 = 6.32709$ kg

Total Nitrogen in Flue gas = $6.32709 + 0.002 = 6.32909$ kg

Excess oxygen in flue gas = $5.478 \times 0.5 \times 0.23 = 0.63$ kg

The percentage composition of dry flue gas is given in Table 6 and (Fig. 12 and 13).

Tables 7 and 8 shows the calculation for find out the percentage composition of dry flue gas produced after direct combustion of Bagasse. The Product after combustion are N₂, O₂, SO₂ and CO₂. About 14.31% (by volume) CO₂ is generated which is about 2% more than the Syn Gas combustion. In addition SO₂ is also produced.

DISCUSSION

The effect of four parameters i.e., Steam temperature, Air Temperature, Steam to Biomass ratio and Gasification Temperature are also discussed for optimization of gasification process.

The environment is a major issue, and it has been a major driver for gasification for energy production. Low energy density and high moisture content are two key disadvantages of using biomass as a solid

fuel. Regulations for making biomass economically viable are in place in India. For if gasification replaces direct combustion in a sugar plant, the plant earns credits for CO₂ reduction equivalent to what the direct combustion was emitting. These credits can be sold on the market for additional revenue.

Gasification of bagasse compare then direct combustion has an edge in certain situations. In combustion systems, sulfur in the fuel appears as SO₂, which is relatively difficult to remove from the flue gas without adding an external sorbent. In a gasification process 93 to 96% of the Sulfur appears as H₂S with the remaining as COS, which can easily extract Sulfur from H₂S by absorption. Even after gasification of Bagasse there are neglected amount of Sulfur produced as discussed earlier. Furthermore, in a gasification plant we can extract it as elemental Sulfur, thus adding a valuable by-product for the plant.

A direct combustion system oxidizes the nitrogen in fuel and in air into NO, the acid rain precursor, or into N₂O, a greenhouse gas. Both are difficult to remove. In a gasification system, nitrogen appears as either N₂ or NH₃, which is removed relatively easily in the syngas-cleaning stage.

CONCLUSION

This work presents a comparative study regarding the modeling and simulation of Bagasse gasification processes with direct combustion in a boiler in a sugar plant. A Simulation is carried out for bagasse gasification in order to study the effect of primary parameters on the production of Syngas. The complete study is carried out for comparison of both the alternatives i.e., either gasified Bagasse or combust it directly in the boiler for production of energy to run the plant. Almost same amount of energy can be generated by both the process, but the environment is a major issue that forces the plant to adopt the gasification technology.

REFERENCES

- Abdelouahed, L., Authier, O., Mauviel, G., Corriou, J.P., Verdier, G. and Dufour, A. (2012). Detailed modeling of biomass gasification in dual fluidized bed reactors under Aspen plus. 2012 American Chemical Society.
- Ahmed, I.I. and Gupta, A.K. (2012). Sugarcane bagasse gasification: Global reaction mechanism of syngas evolution. *Applied Energy*. 91 : 75-81.
- Anthony, A., Sampson, M., Edson, M. and Omobola, O. (2014). Computer simulation of the mass and energy balance during gasification of sugarcane bagasse. *Journal of Energy*. 9.
- Anthony, A., Sampson, M., Prashant, R., Edson, M. and Omobola, O. (2016). Pre-processing of sugar cane bagasse for gasification in a downdraft biomass gasifier system: A comprehensive review. *Renewable and Sustainable Energy Reviews*. 66 : 775-801.
- Ashok, J.K., Amba, P.R.G. and Rajendrakumar, G.T. (2014). Simulation of biomass gasification in downdraft gasifier for different biomass fuels using ASPEN PLUS. *Clean Techn Environ Policy*. 17 : 465-473.
- ASTM D1102 - 84. (2013). Standard test method for ash in wood.
- ASTM E871 - 82. (2013). Standard test method for moisture analysis of particulate wood fuels.
- ASTM E872 - 82. (2013). Standard test method for volatile matter in the analysis of particulate wood fuels.
- Catharina, E., Emilia, B., David, B., Marian, G. and Torsten, H.F. (2006). Pyrolysis and gasification of pellets from sugar cane bagasse and wood. *Fuel*. 85 : 1535-1540.
- Chauhan, M.K., Varun, C.S. and Suneel. K.S. (2011). Life cycle assessment of sugar industry: A review. *Renewable and Sustainable Energy Reviews*. 15 : 3445-3453.
- Daniel, T.P., Einar, B.M., Nestor, P.P., Lúcia, B.B. and Jos, L.S. (2017). Technical assessment of the Biomass Integrated Gasification/Gas Turbine Combined Cycle (BIG/GTCC) incorporation in the sugarcane industry. *Renewable Energy*. 114 : 464-479.
- Dipal, B. and Baruah, D.C. (2014). Modeling of biomass gasification: A review. *Renewable and Sustainable Energy Reviews*. 39 : 806-815.
- Eikeland, M.S., Thapa, R.K. and Halvorsen, B.M. (2015). Aspen plus simulation of biomass gasification with known reaction kinetics. Proceedings of the 56th SIMS. Linköping, Sweden.
- Gagliano, A., Nocera, F., Bruno, M. and Cardillo, G. (2017). Development of an equilibrium-based model of gasification of biomass by Aspen plus, 8th International Conference on Sustainability in Energy and Buildings. *Energy Procedia*. 111 : 1010-1019.
- Godswill, U. and Megwai, T.R. (2016). A techno-economic analysis of biomass power systems using Aspen plus. *International Journal of Power and Renewable Energy Systems (IJPRES)*. 3.
- Gupta, N., Tripathi, S. and Balomajumder, C. (2011). Characterization of pressmud: A sugar industry waste. *Fuel*. 90 : 389-394.
- Islam, M.N., Zailani, R. and Ani, F.N. (1999). Pyrolytic oil from fluidized bed pyrolysis of oil palm shell and its characterize ation. *Renew. Energy*. 17 : 73-84.
- Islam, M.R., Haniu, H., Islam, M.N. and Uddin, M.S. (2010a). Thermochemical conversion of sugarcane bagasse into bio-crude oils by fluidized-bed pyrolysis technology. *J. Therm. Sci. Technol*. 5 : 11-23.
- Islam, M.R., Islam, M.N. and Islam, M.N. (2003). The fixed bed pyrolysis of sugarcane bagasse for liquid fuel production. In: Proc. of the Int. Conf. on Mechanical Engineering (ICME2003), Bangladesh. 26-28.
- Islam, M.R., Islam, M.N. and Nabi, M.N. (2002). Bio-crude-oil from fluidized bed pyrolysis of rice-straw and its characterization. *Int. Energy*. 3 : 1-11.
- Islam, M.R., Parveen, M. and Haniu, H. (2010b). Properties of sugarcane waste-derived bio-oils obtained by fixed-bed fire-tube heating pyrolysis. *Bioresour. Technol*. 101 : 4162-4168.
- Jaiver, E.J.F., Yurany, C.A., Rubens, M.F. and Maria, R.W.M. (2014) Fluidized bed reactor for gasification of sugarcane bagasse: Distribution of syngas, bio-tar and char. The Italian Association of Chemical Engineering.
- Ke, S. (2014). Optimization of biomass gasification

- reactor using Aspen Plus. Telemark University College.
- Mavukwana, K., Jalama, F.N. and Harding, K. (2013). Simulation of Sugarcane Bagasse Gasification using Aspen Plus. International Conference on Chemical and Environmental Engineering (ICCEE'2013). 2013 Johannesburg, South Africa.
- Pardo-Planas, O., Atiyeh, H.K., Phillips, J.R., Aichele, C.P. and Mohammad, S. (2017). Process simulation of ethanol production from biomass gasification and syngas fermentation. *Bioresource Technology*. 245.
- Po-Chih, K., Wei, W. and Wei-Hsin, C. (2014). Gasification performances of raw and torrefied biomass in a downdraft fixed bed gasifier using thermodynamic analysis. *Fuel*. 117 : 1231-1241.
- Priyanka, K. and Rakesh, T. (2017). Advanced simulation of biomass gasification in a fluidized bed reactor using ASPEN PLUS. *Renewable Energy*. 101 : 629-636.
- Ranjit, D., Arne, J., Charles, C. and Dan, K. (2013). Thermal gasification or direct combustion? Comparison of advanced cogeneration systems in the sugarcane industry. *Biomass and Bioenergy*. 55 : 163-174.
- Rasul, M.G., Rudolph, V. and Carsky, M. (1999). Physical properties of bagasse. *Fuel*. 78 : 905-910.
- Roos, C. (2010). Clean heat and power using biomass gasification for industrial and agricultural projects. U.S. Department of Energy. 1-9.
- Yurany, C.A., Jaiver, E.J.F., Betânia, H.L., Rubens, M.F. and Maria, R.W.M. (2014). Simulation of ethanol production via fermentation of the synthesis gas using Aspen plus. The Italian Association of Chemical Engineering. www.aidic.it/cet.
- Yurany, C.A., Jaiver, E.J.F., Betânia, H.L., Rubens, M.F. and Maria, R.W.M. (2012). Syngas production from sugar cane bagasse in a circulating fluidized bed gasifier using Aspen Plus: Modelling and Simulation, Ian David Lockhart Bogle and Michael Fairweather (Editors). Proceedings of the 22nd European Symposium on Computer Aided Process Engineering. London, UK.